

KOMI

ster[®]til

FREEDOMLIFT



FREEDOM LIFT

HEAVY DUTY 2-POST LIFT



SK 2055 / SK 2055EFA

Capacities 5,500 kg

- Symmetrical open floor design providing work and moving space in the workshop
- Smooth lifting/lowering synchronisation by Pulse Width Modulated (PWM) hydraulic valves
- Independent mechanical locking system with 35 mm increments starting 210 mm from floor level
- Fast lifting speed of 39 seconds
- Model SK 2055 is executed with double telescopic support arms. The SK 2055EFA is executed with extended flex arms.



STERIL
SUPERIOR SOLUTIONS BY
QUALITY PEOPLE

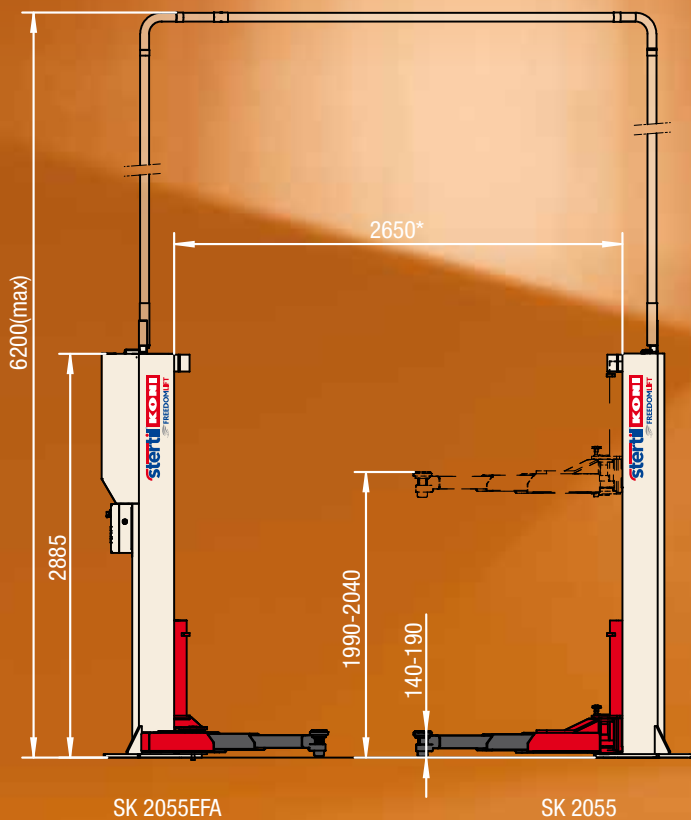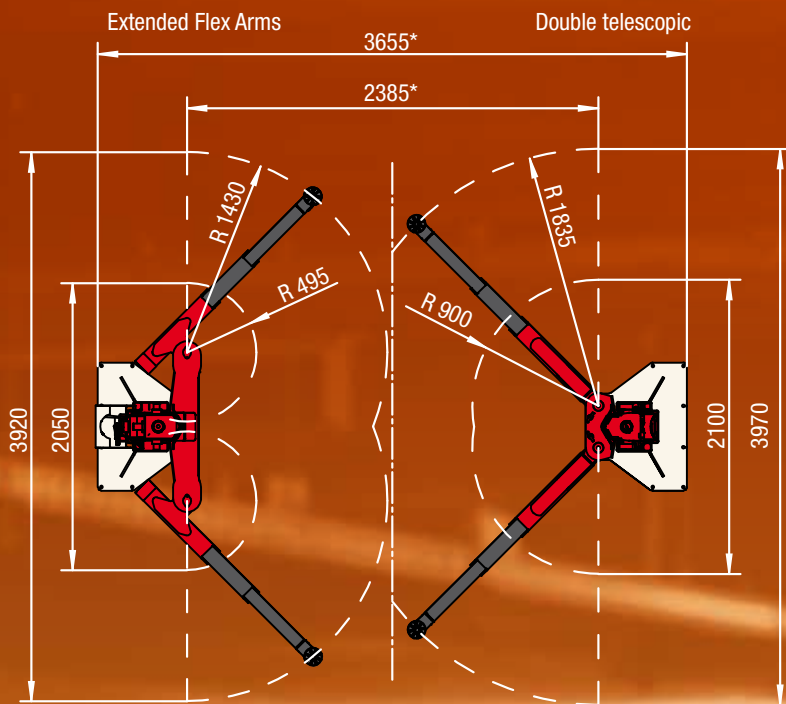

Model	SK 2055	SK 2055EFA
Lifting capacity	5,500 kg	5,500 kg
Lifting height	2040 mm	2040 mm
Min. pick-up height	140 mm	140 mm
Arm length (double telescopic)	min	495 mm
	max	1430 mm
Lifting time	39 sec	39 sec
Motor power	4 kW	4 kW

For more information

For more or specific information about the Stertil-Koni FREEDOM LIFT or any of Stertil-Koni's other top products, please do not hesitate to contact us. We will be pleased to assist you.

* Flexible dimensions. Technical specifications are available at www.stertil-koni.nl



Stertil B.V.
P.O.Box 23
9288 ZG Kootstertille
(The Netherlands)
Tel. +31 (0)512 334444
Telefax +31 (0)512 334430
www.stertil-koni.nl
e-mail info@stertil.nl