

# MagiX 30

Electro-hydraulic scissor lift, 3 t capacity



## Application

- Check-in
- Repair and maintenance

## Approvals / recommendations

- Renault
- Volvo

## Description:

- Double master / slave system
- Control stand with integrated pump unit and alarm signal
- Electronic synchronization
- Emergency lowering valve
- Sturdy scissor construction
- No mechanical connection between scissor sections
- Optimum access to vehicle
- Low minimum height

## Standard colours:

- Platforms & scissor: RAL 7016 – grey
- Ramps: RAL 3020 – red

## Versions:

- Available with different voltages
- For surface-mounting or recession
- S = superstructure on floor
- I = superstructure in floor
- G = galvanized upper plates and base frame

## Optional extras:

- LED-lighting set for surface-mounted versions
- Set of expansion bolts
- Set rubber blocks, 40, 60, 70, 80 and 100 mm

**Special colours available on request!**



Scan the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**


Sandkampstraße 90  
D-48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Barrit Langgade 188-190  
DK-7150 Barrit  
☎ +45 76 82 13 30  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

Technical data	
Lifting capacity	3,000 kg
Lifting height	1,845 mm
Working height	S: 1,950 mm l: 1,845 mm + Rubber pads
Lifting / lowering time	45 (40) sec.
Pump unit	2.2 kW
Voltage	3x230 / 400V – 50 Hz

Scissor platforms	
Platform length	1,490 – 2,040 mm
Platform width	670 mm
Distance between platforms	720 mm
Min. height	105 mm
Depth of recess	S: 0 mm l: 105 mm

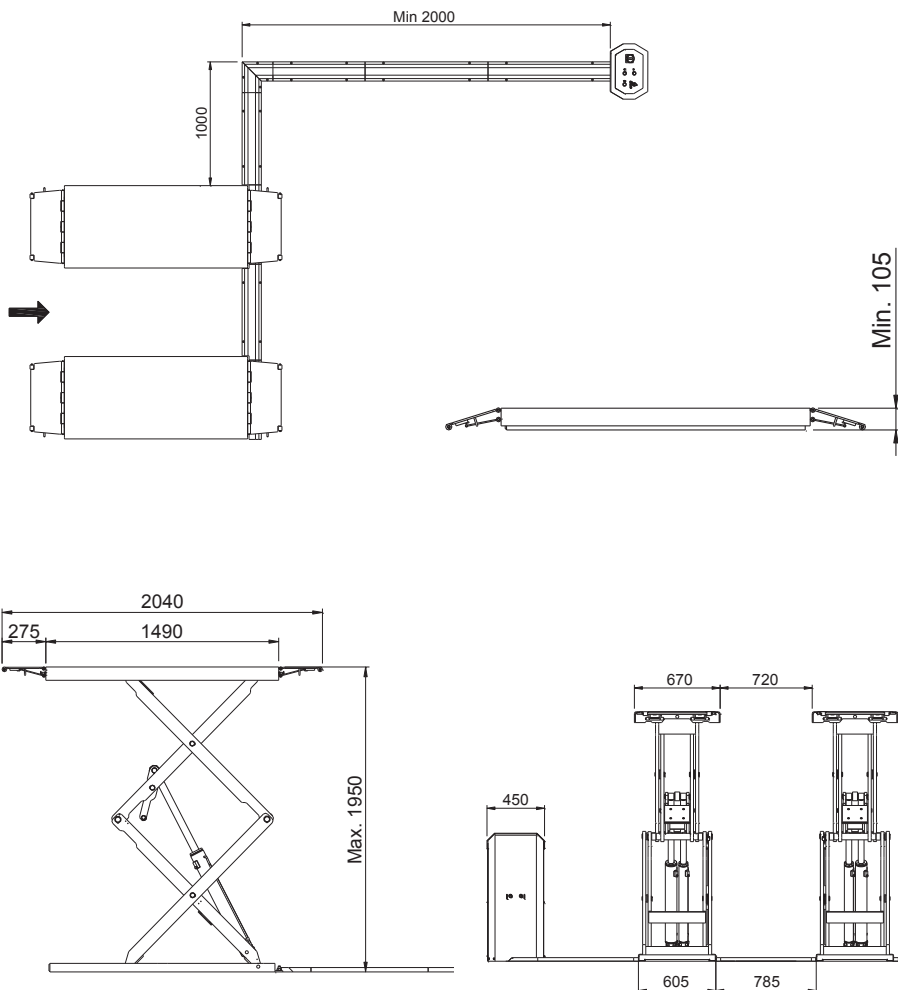

Recessed installation



Available with galvanized base frame



Self-lubricating bearing