

# MagiX 50-52

Electro-hydraulic scissor lift with platforms, 5 t capacity



## Application

- Check-in
- Repair and maintenance
- Wheel alignment

## Description:

- Control unit with integrated pump unit, alarm signal and digital height indication
- Electronic synchronization
- Emergency lowering valve
- Sturdy scissor construction
- No mechanical connection between scissor sections
- Optimum access to vehicle
- Variable installation width

## Standard colours:

- Platforms and scissor: RAL 7016 grey
- Short drive-over ramps: cold galvanized
- Long drive-on ramps and floor ramps: painted

## Versions:

- Available with different voltages
- S = Flush platforms
- WL = With front recesses for turn tables and rear side slip plates
- C (Combi) = Platforms with integrated free-wheel lift
- P (play detector) = platform with play detector
- Incl. guiding edges for scissor jack for all models as standard
- Base frame galvanized as standard
- 52 = 5,200 mm platforms
- Play detector with 6 movement directions

## Optional extras:

- Set of expansion bolts
- Set of rubber blocks, 80 mm
- KTL coating for platforms
- LED lightning set
- Installation frame for recessed installation
- Air hydraulic scissor jack

**Special colours available on request!**



Scan the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Sandkampstraße 90  
D-48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Barrit Langgade 188-190  
DK-7150 Barrit  
☎ +45 76 82 13 30  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**Technical data**


Lifting capacity	5,000 kg
Lifting height	1,850 mm
Working height	2,150 mm
Lifting / lowering time	50 sec.
Pump unit	3 kW
Voltage	3x230 / 400V – 50 Hz

**Scissor platforms**

Platform length	5,200 mm
Platform width	630 mm
Distance between platforms	800 – 1,020 mm
Min. height	255 mm
Depth of recess	0 mm

**Free-wheel lift**

Lifting capacity	3,500 kg
Lifting height	500 mm
Min. height	0 mm
Lifting / lowering time	8 / 8 sec.
Operation	hydraulic
Length	1,420 – 2,100 mm

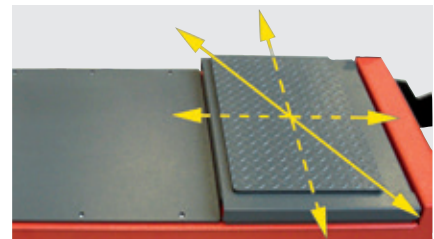


Play detector with 6 movement directions





Control unit



Safety ratchet

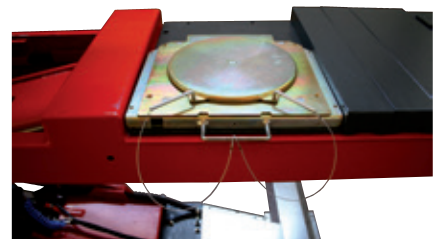

Recess for turn tables

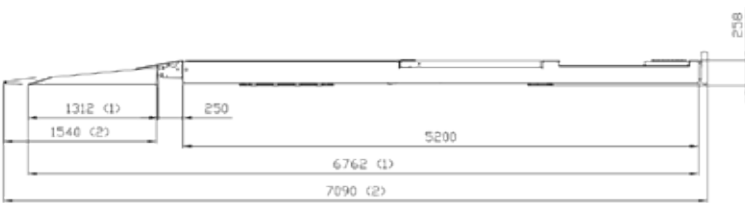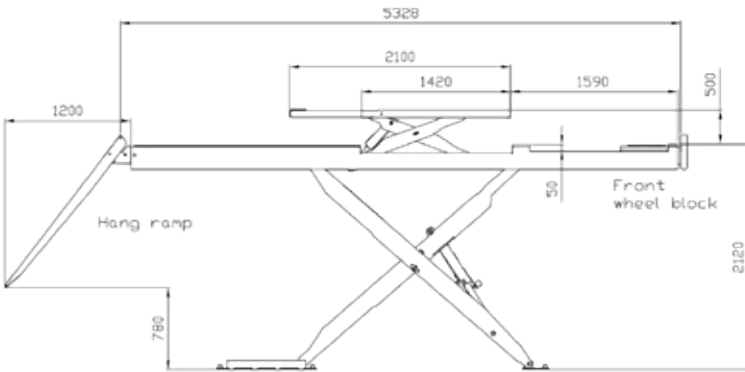

1) Floor ramp  
2) Hang ramp

