

stertil® **KON**

FREEDOMLIFT



FREEDOM LIFT

HEAVY DUTY 2-POST LIFT



SK 2070 / SK 2090

Capacities 7,000-9,000 kg

- Symmetrical open floor design providing work and moving space in the workshop
- Smooth lifting/lowering synchronisation by Pulse Width Modulated (PWM) hydraulic valves
- Independent mechanical locking system with 35 mm increments starting 210 mm from floor level
- Fast lifting speed of 58 seconds
- Single and double telescopic support arm sets available



STERIL
SUPERIOR SOLUTIONS BY
QUALITY PEOPLE

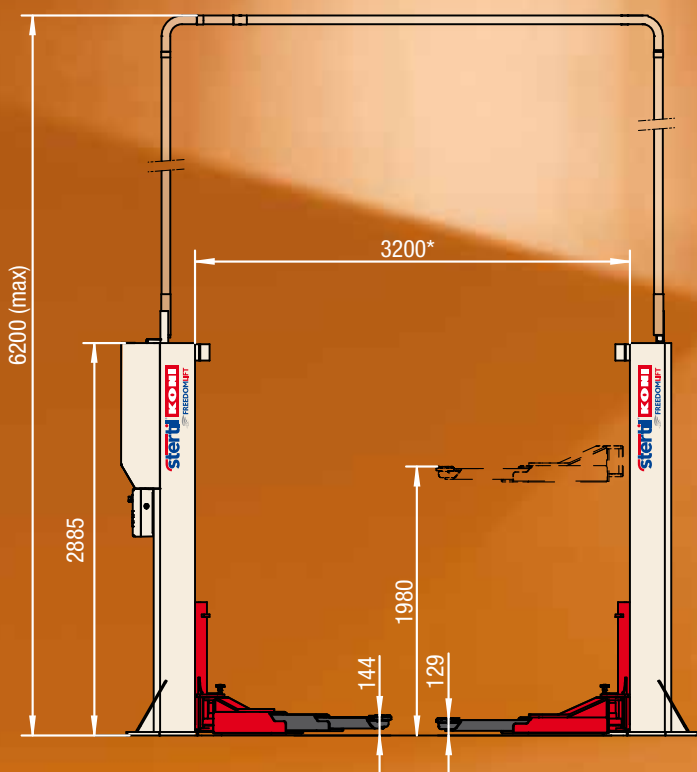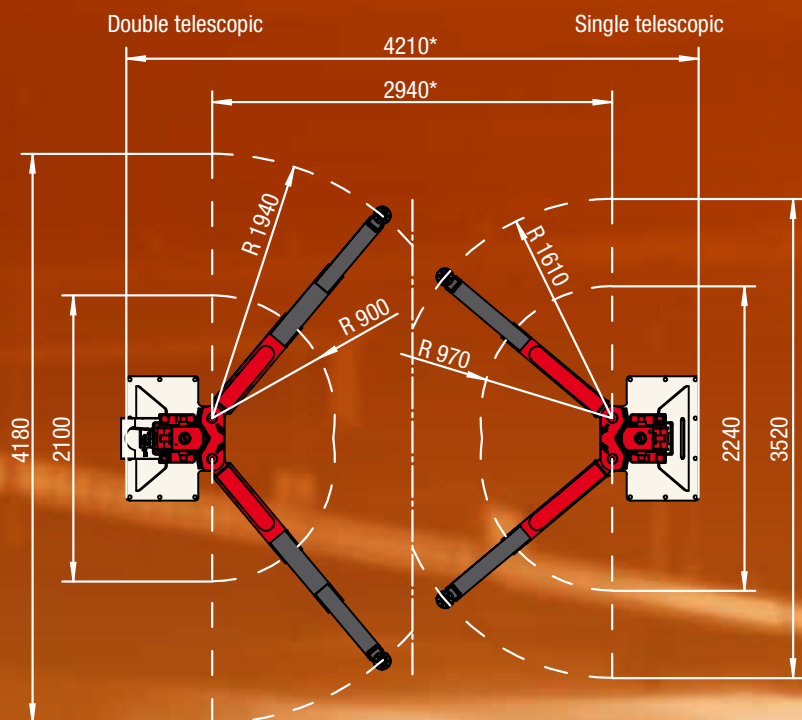

Model		SK 2070	SK 2090
Lifting capacity		7,000 kg	9,000 kg
Lifting height		1980 mm	1980 mm
Min. pick-up height		129 mm	129 mm
Arm length (single telescopic)	min	970 mm	970 mm
	max	1610 mm	1610 mm
Arm length (double telescopic)	min	900 mm	900 mm
	max	1940 mm	1940 mm
Lifting time		58 sec	58 sec
Motor power		4 kW	4 kW

For more information

For more or specific information about the Stertil-Koni FREEDOM LIFT or any of Stertil-Koni's other top products, please do not hesitate to contact us. We will be pleased to assist you.

* Flexible dimensions. Technical specifications are available at www.stertil-koni.com



Stertil B.V.
P.O.Box 23
9288 ZG Kootstertille
(The Netherlands)
Tel. +31 (0)512 334444
Telefax +31 (0)512 334430
www.stertil-koni.nl
e-mail info@stertil.nl