


Application

- ☐ Check-in
- ☐ Repair and maintenance

Approvals

- ☐ Renault

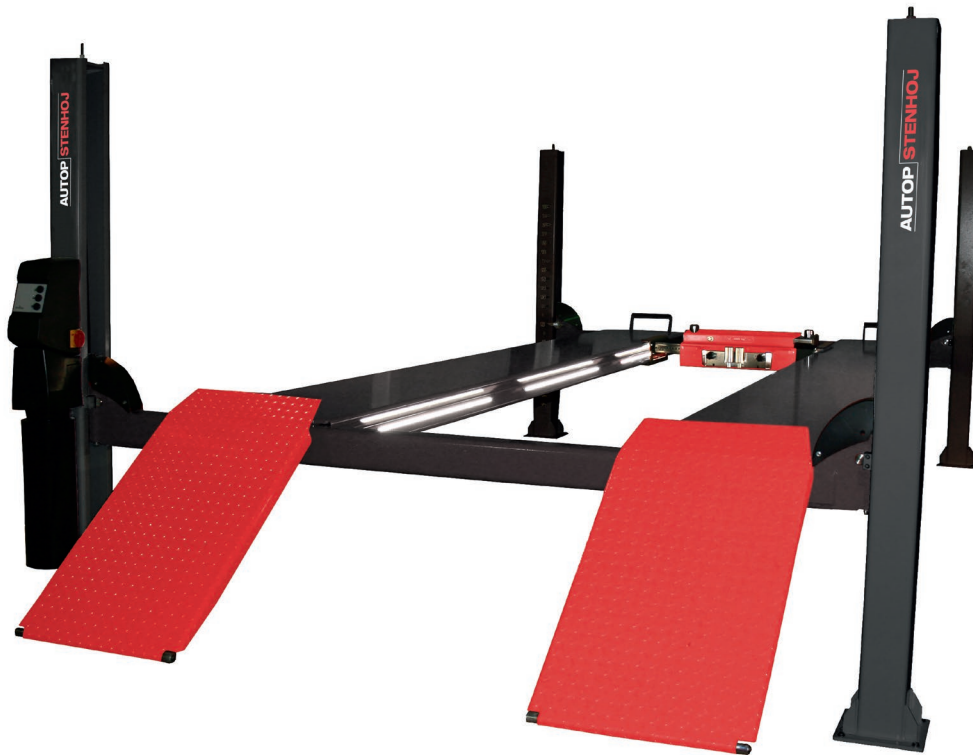

Major 7230

Electro-hydraulic 4-post lift, 7.2 t capacity

Description:**Post:**

- ☐ Integrated eccentric brake system
- ☐ Emergency stop valve
- ☐ Obstruction system
- ☐ Pneumatic parking system in height adjustable ratchets
- ☐ Pump and control unit on rear left post
- ☐ Pushbutton control unit with alarm signal
- ☐ Hydraulic cylinder under left platform
- ☐ Lifting and lowering by means of cables
- ☐ Emergency lowering valve

Superstructure:


- ☐ One movable platform as standard
- ☐ Platforms prepared for AUTOPSTENHOJ Scissor jack Micro

Standard colours

- ☐ Platforms & posts: Grey RAL 7016
- ☐ Ramps: Red RAL 3020

Technical data	
Lifting capacity	7,200 kg
Lifting height	1,670 mm
Working height	1,840 mm
Lifting / lowering time	app. 40/58 Sec.
Pump unit	3.0 kW
Voltage	3x230/400V - 50 Hz - 25/16 A

Platforms	
Total length	7,280 mm
Usable length of platform	6,000 mm
Wheel base, min. - max.	variabel
Platform width	630 mm
Distance between platforms	725 - 1,210 mm
Min. height	170 mm
Width between posts	3,000 mm
Total width - outer edges posts	3,432 mm
Total height	2,235 mm

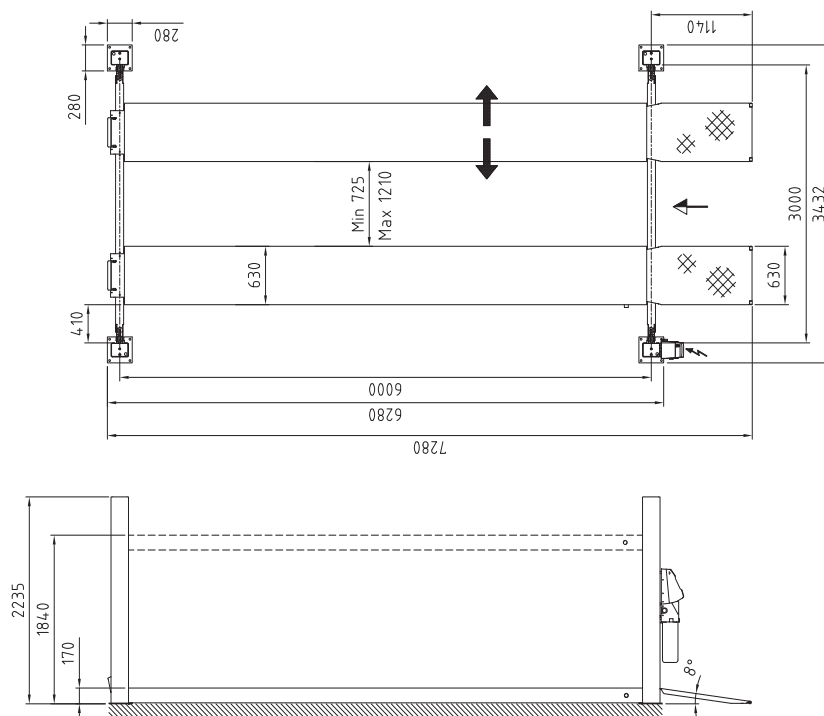
autop Maschinenbau GmbH

Sandkampstraße 90
 48432 Rheine | Germany
 ☎ +49 5971 8602-02
 📠 +49 5971 8602-25
 ✉ info@autopstenhoj.com

STENHOJ A/S

Barrit Langgade 188-190
 7150 Barrit | Denmark
 ☎ +45 76821-330
 📠 +45 76821-331
 ✉ info@autopstenhoj.com

Versions:

- ☐ Available with different Voltage
- ☐ Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation


Installation:

- ☐ S = flush platforms
- ☐ G = galvanized platforms
- ☐ 55 = 5,500 mm platforms
- ☐ 60 = 6,000 mm platforms

Optional extras:

- ☐ Set of expansion bolts
- ☐ Extra control unit
- ☐ LED-Lighting set
- ☐ Set of two 385 mm ramp extensions
- ☐ Set of two platform extensions (0.5 m)

**Special colours available
on request!**



Produktdetails